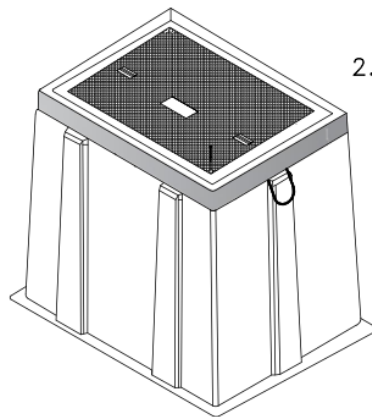
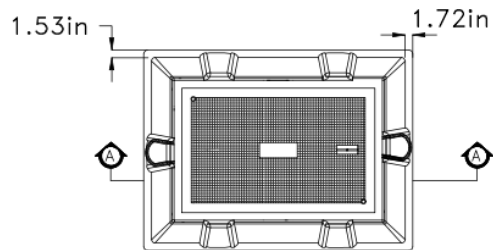


NS121212T22

12" X 12" X 12" Tier-22

LOAD RATING:

ANSI/SCTE: 77 Tier 22

Test Load Rating: 33,750 lbs.

Design Load Rating: 22,500 lbs.

Driveway, parking lot, and off-roadway applications subject to occasional non-deliberate heavy vehicular traffic. Example: Sidewalks in residential or public areas where heavy vehicle traffic is unlikely, but may occur.

SPECIFICATIONS:

Polymer Concrete Cover & Fiberglass Reinforced Frame

Thickness Fiberglass Wall: 3/16

Non-Conductive Material







Stainless Steel List Pin: 3/16

Approximate Weight:

- Cover: 42 lbs.
- Box: 55 lbs.
- Total Weight: 178 lbs.
- Units per Pallet: 14
- Total units per Truckload: 476

3/8 Stainless Steel Hex Bolt Fastening System

Custom Logo: Per customer request

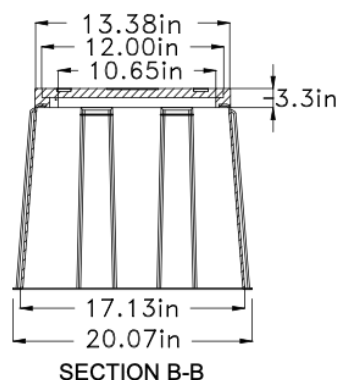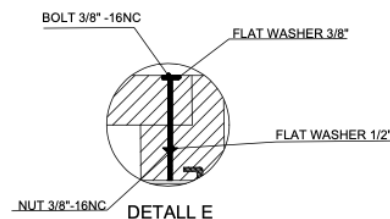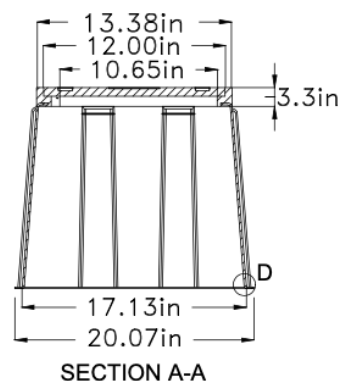

SECTION C-C